




The Perfect Symmetry of
Form and Function in
Flame Resistant Fabrics



Specifications

- ★ Made with solution-dyed SaturaMax®.
- ★ Finished with exclusive HydroMAX+™ technology for water, dirt and mildew resistance.
- ★ Meets CSFM T19, CPAI-84, NFPA701, CAN/ULC-S109, FMVSS 302 and ASTM-E84 Class A.

Care Instructions

WeatherMAX fabrics may be spot washed by using a soapy solution of a mild detergent and lukewarm water. Rinse thoroughly with clean water to remove soap and allow to air dry. For mildew stains, prepare a solution of (1) cup bleach plus (½) cup of mild detergent per gallon of water. Spray on the entire area and allow soaking. Rinse with clean water and allow to air dry.

WeatherMAX FR Warranty

The limited warranty covers only the fabric being unserviceable because of loss of strength and/or color from normal conditions of exposure. That includes sunlight, mildew and atmospheric chemicals. Labor and installation supplied by the fabricator and/or installer are not covered. The consumer is responsible for normal care, cleaning and maintenance of the fabric.

- ★ The warranty runs for 5 years from the date of original purchase for WeatherMAX FR fabrics.
Excludes True Red fabrics which feature a 3-year limited warranty.
- ★ Safety Components will supply new fabric, free of charge, to replace the unserviceable fabric.
- ★ Call your dealer who will contact Safety Components to request fabric replacement.
- ★ A valid copy of the original invoice, showing date of purchase, is required for fabric replacement.
- ★ This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

See website for warranty details.

Properties

Fabric Weight	9.75 oz/yd ² (330 g/m ²)
Thickness	0.44 mils
Width-Fused Edge	60 in (152 cm)
Put Up	65 yards (59 meters)
Tensile Strength ASTM D5034 (warp x fill/lbs)	460 x 360
Mullen Burst ASTM D3786 (psi)	393
Tongue Tear ASTM D2261 (warp x fill/lbs)	13 x 15
Hydrostatic Pressure AATCC 127 (cm)	90+
Rain Test 2 minutes/600 mm	0.00
Spray Rating AATCC 22	100
Air Permeability ASTM D737 (cfm)	0.2
Cold Crack 40°/ASTM D1912	Pass
UPF (Ultraviolet Factor)	50+
UVA & UVB (Ultraviolet Blockage)	Over 99%
Color Fastness to Light AATCC 169 option 1 (1500 hours: scale 1 - 5)	4 - 5



WeatherMAX, HydroMAX+ and ColorTite are trademarks or registered trademarks of Safety Components, Inc.
SaturaMax is a registered trademark of Unifi, Inc.



SAFETY COMPONENTS

Elevate Textiles

40 Emery Street
Greenville, SC 29605
800.896.6926 ext. 28
www.weathermax.com





Built To Perform Designed To Inspire




GRAPHITE FR431

A truly versatile outdoor fabric that combines superior strength, durability and long-term color retention with flame resistant properties that meet or exceed the most stringent requirements. The industry's most complete and cost-effective FR fabric is ideally suited for awnings, tents, shade sails or any outdoor application requiring resistance to heat and flames, maximum performance and superior protection from the elements.

The exterior of WeatherMAX FR matches perfectly with WeatherMAX 80 allowing you to provide a uniform appearance with a combination of FR-rated and standard awning grade fabric, resulting in significant savings when only certain areas of an installations needs to meet fire resistant standards.

Meets the following FR codes and certifications:

- Meets California State Fire Marshall Title 19 Section 13115
- CPAI-84
- NFPA 701
- CAN/ULC-S109
- FMVSS 302
- ASTM-E84 Class A or 1

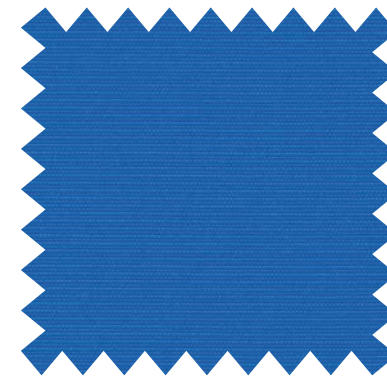


PACIFIC BLUE FR346




ROYAL FR401




CAPTAIN NAVY FR354

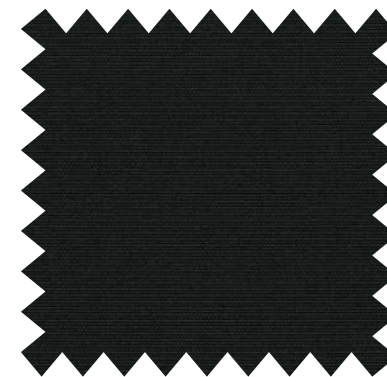

BLACK FR355

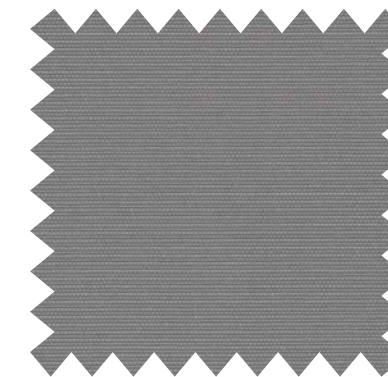


LIGHT CHARCOAL FR334

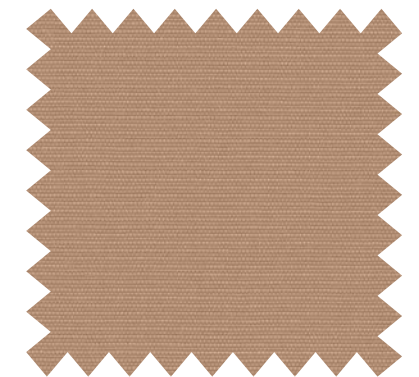


TOAST FR348



FOREST GREEN FR342

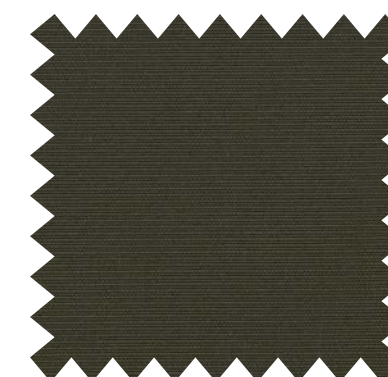

MOSS FR403

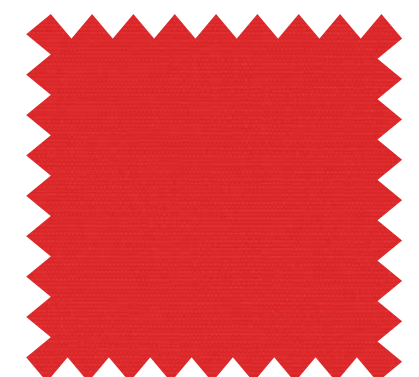

TRUE RED* FR344

*Denotes 3-year limited warranty.